




Chroma-Q®

Fixture photometric table

Fixture model
Color Force II Plus 48
Field: 54°
Beam: 26°
Magnification (mf): 0.46 x
Candelas: 67500 Cd
Lumens: 18400 lm
Watts: 426 w
Lumen/w: 158.5 lm/w
CRI Ra: 92
TM-30 Rf / Rg: 88 / 105
Duv: -0.0012

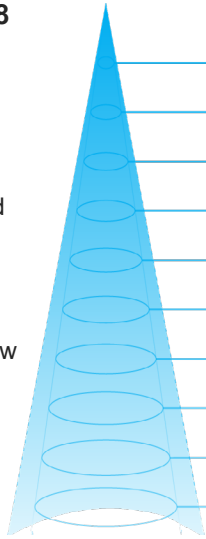


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.0 m	3.3 ft	0.5 m	1.5 ft	67500 lx	6271 fc
1.53 m	5.0 ft	1.6 m	5.1 ft	0.7 m	2.3 ft	28835 lx	2679 fc
3.05 m	10.0 ft	3.1 m	10.2 ft	1.4 m	4.6 ft	7256 lx	674 fc
3.95 m	13.0 ft	4.0 m	13.2 ft	1.8 m	6.0 ft	4326 lx	402 fc
4.56 m	15.0 ft	4.6 m	15.2 ft	2.1 m	6.9 ft	3246 lx	302 fc
6.10 m	20.0 ft	6.2 m	20.4 ft	2.8 m	9.2 ft	1814 lx	169 fc
6.85 m	22.5 ft	7.0 m	22.9 ft	3.2 m	10.4 ft	1439 lx	134 fc
7.63 m	25.0 ft	7.8 m	25.5 ft	3.5 m	11.6 ft	1159 lx	108 fc
9.15 m	30.0 ft	9.3 m	30.6 ft	4.2 m	13.9 ft	806 lx	75 fc
10.07 m	33.0 ft	10.3 m	33.7 ft	4.6 m	15.3 ft	666 lx	62 fc



Chroma-Q®

Fixture photometric table

Fixture model
 Color Force II Plus 48 Border Lens
Field: 68°
Beam: 38°
Magnification (mf): 0.69 x
Candelas: 26500 Cd
Lumens: 15900 lm
Watts: 426 w
Lumen/w: 62.3 lm/w
CRI Ra: 92
TM-30 Rf / Rg: 88 / 105
Duv: -0.0012

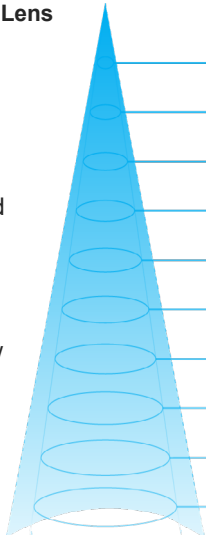


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.3 m	4.4 ft	0.7 m	2.3 ft	26500 lx	2462 fc
1.53 m	5.0 ft	2.1 m	6.8 ft	1.1 m	3.5 ft	11320 lx	1052 fc
3.05 m	10.0 ft	4.1 m	13.5 ft	2.1 m	6.9 ft	2849 lx	265 fc
3.95 m	13.0 ft	5.3 m	17.5 ft	2.7 m	8.9 ft	1698 lx	158 fc
4.56 m	15.0 ft	6.2 m	20.2 ft	3.1 m	10.3 ft	1274 lx	118 fc
6.10 m	20.0 ft	8.2 m	27.0 ft	4.2 m	13.8 ft	712 lx	66 fc
6.85 m	22.5 ft	9.2 m	30.3 ft	4.7 m	15.5 ft	565 lx	52 fc
7.63 m	25.0 ft	10.3 m	33.8 ft	5.3 m	17.2 ft	455 lx	42 fc
9.15 m	30.0 ft	12.3 m	40.5 ft	6.3 m	20.7 ft	317 lx	29 fc
10.07 m	33.0 ft	13.6 m	44.6 ft	6.9 m	22.8 ft	261 lx	24 fc



Chroma-Q®

Fixture photometric table

Fixture model
Color Force II Plus 48 Cyc Lens
Field: 120°
Beam: 44°
Magnification (mf): 0.81 x
Candelas: 24300 Cd
Lumens: 15500 lm
Watts: 426 w
Lumen/w: 57.3 lm/w
CRI Ra: 92
TM-30 Rf / Rg: 88 / 105
Duv: -0.0012

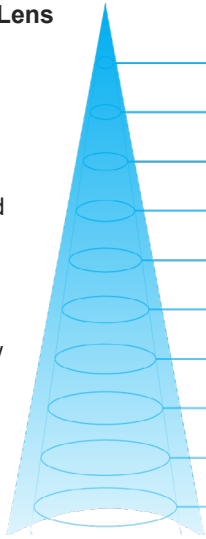

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	3.5 m	11.4 ft	0.8 m	2.7 ft	24300 lx	2258 fc
1.53 m	5.0 ft	5.3 m	17.4 ft	1.2 m	4.1 ft	10381 lx	964 fc
3.05 m	10.0 ft	10.6 m	34.7 ft	2.5 m	8.1 ft	2612 lx	243 fc
3.95 m	13.0 ft	13.7 m	44.9 ft	3.2 m	10.5 ft	1557 lx	145 fc
4.56 m	15.0 ft	15.8 m	51.8 ft	3.7 m	12.1 ft	1169 lx	109 fc
6.10 m	20.0 ft	21.1 m	69.3 ft	4.9 m	16.2 ft	653 lx	61 fc
6.85 m	22.5 ft	23.7 m	77.9 ft	5.5 m	18.2 ft	518 lx	48 fc
7.63 m	25.0 ft	26.4 m	86.7 ft	6.2 m	20.2 ft	417 lx	39 fc
9.15 m	30.0 ft	31.7 m	104.0 ft	7.4 m	24.3 ft	290 lx	27 fc
10.07 m	33.0 ft	34.9 m	114.4 ft	8.1 m	26.7 ft	240 lx	22 fc