

EclExpo Flood300VW

300W asymmetric LED floodlight, with Variable White CCT 2,700K - 6,500K



The **EclExpo Flood300VW** is a variable white LED Floodlight, designed for exhibitions and showrooms, as a high-quality LED replacement of traditional tungsten, CDM or HMI asymmetric luminaires.

The **EclExpo Flood300VW** has a 300W LED source, with variable white ranging from 2,700K to 6,500K, and an outstanding lumen output with high-scoring CRI levels (>95), TM-30, R9. Combined with a reflector, it has a wide asymmetric beam angle of 100° (Horizontal) x 60° (Vertical) of indirect light emission.

This unit is incredibly user-friendly, using remote control via DMX and RDM (optional W-DMX + CRMX), or intuitive stand-alone operation through an on-board display and two rotatory knobs CCT and dimmer settings.

Its unique design and performance set a new standard for exhibition floodlights.

MAIN FEATURES

- 300W Variable White LED source, from 2,700K to 6,500K
- Asymmetric beam angle of 100° (horizontal) x 60° (vertical)
- Xlr5p in/through for DMX/RDM control and communication, optional W-DMX + CRMX, Stand-Alone mode through two rotatory knobs

VERSIONS

Code	Housing
ECLEXPFL300VWBK	Black
ECLEXPFL300VWWH	White

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source:300 W Variable White LED
- CCT:2.700 K - 6.500
- Luminous flux:@2.700K 7'690 lm; @6.500K 10'877 lm; @full 13'044 lm
- Lux:@2.700K 72 lx; @6.500K 101 lx; @full 121 lx @5 m
- CRI:97,7 @2.700 K; 95,6 @6.500 K; 94,9 @full
- R9:84,9 @2.700 K; 86,7 @6.500 K; 82,8 @full
- TLCI:97 @2.700 K; 97 @6.500 K; 97 @full
- TM30 Rf:> 95 @2.700 K; > 91 @6.500 K; > 92 @full
- TM30 Rg:< 102 @2.700 K; < 102 @6.500 K; < 104 @full
- Source life expectancy: > 20.000 h

OPTICS

- Optics: asymmetrical beam reflector in pure aluminium 99,6%
- Beam angle:(H) 100° x (V) 60°

COLOUR SYSTEM

- Colour mixing: tunable white
- CCT: CCT control through dedicated DMX channel
- White presets:2.700 K - 6.500 K
- Colour wheel: built-in white presets

DYNAMIC EFFECTS

- Control Resolution: 16-bit dimmer
- Static mode: selection of static dimmer and color temperature
- Manual mode: manual adjustment of intensity and CT from knob
- Auto mode: built-in programs with execution speed adjustment

BODY

- Body:sturdy die-cast magnesium body
- Body colour: RAL 9004
- Other:see available accessories

CONTROL

- Protocols: DMX512, RDM
- Stand Alone:2 rotatory knobs
- DMX channels:1 / 2 / 3 / 5 / 11 channel
- Wireless Control: optional, LumenRadio Timo Fx DMX/RDM compatible with both CRMX (Lumen Radio) and W-DMX (Wireless DMX)
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves:4 selectable dimming modes available
- Strobe / shutter:1 - 30 Hz, electronic
- Operating temperature: -10° ~ +45°
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption:340 W
- Output (at 230V):8 units on a single power line
- Power factor:> 0,97

PHYSICAL

- IP rating:20
- Cooling: active, silent operation
- Suspension and fixing: bracket for hanging and positioning
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- Dimensions (WxHxD):391x247x210 mm
- Weight:5,1 kg

CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

ACCESSORIES & RELATED PRODUCTS


▪ 9513FXWL03	Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket, L.3 m	▪ ECLEXPOFL300WVFFB	Filter frame for ECLEXPOFL300VW, black finishing
▪ 9533FXWL03	Ass. 3x2.5mm TH07 cable, SHUKO plug, MENAC3FXW socket, L.3m	▪ ECLEXPOFL300WVFFW	Filter frame for ECLEXPOFL300VW, white finishing
▪ 958225L03	3x2.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW, L. 3m	▪ ECLEXPOFL300VWLVB	Anti-glare louvre for ECLEXPOFL300VW, black finishing
▪ C6002B	Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black	▪ ECLEXPOFL300VWLWV	Anti-glare louvre for ECLEXPOFL300VW, white finishing
▪ RSR0630B	Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black	▪ ECLEXPOFL300VWBDB	Barndoor for ECLEXPOFL300VW, black finishing
▪ TOUR53415L03	Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FX XLR (f) 5p, L.3m	▪ ECLEXPOFL300VWBDW	Barndoor for ECLEXPOFL300VW, white finishing
▪ FCLEXPOFL300	Flight case for 6 pcs of ECLEXPOFL300VW	▪ ECLEXPOFL300VWVKB	Wireless kit for ECLEXPOFL300VW, black finishing
		▪ ECLEXPOFL300VWVKW	Wireless kit for ECLEXPOFL300VW, white finishing
		▪ LRLUNA	Single Universe DMX transceiver with Bluetooth
		▪ SPGM10	28mm spigot for fixtures, M10 bolt
		▪ SPGM12	28mm spigot for fixtures, M12 bolt

PRESET 2,700K

Beam angle 50%: 70°

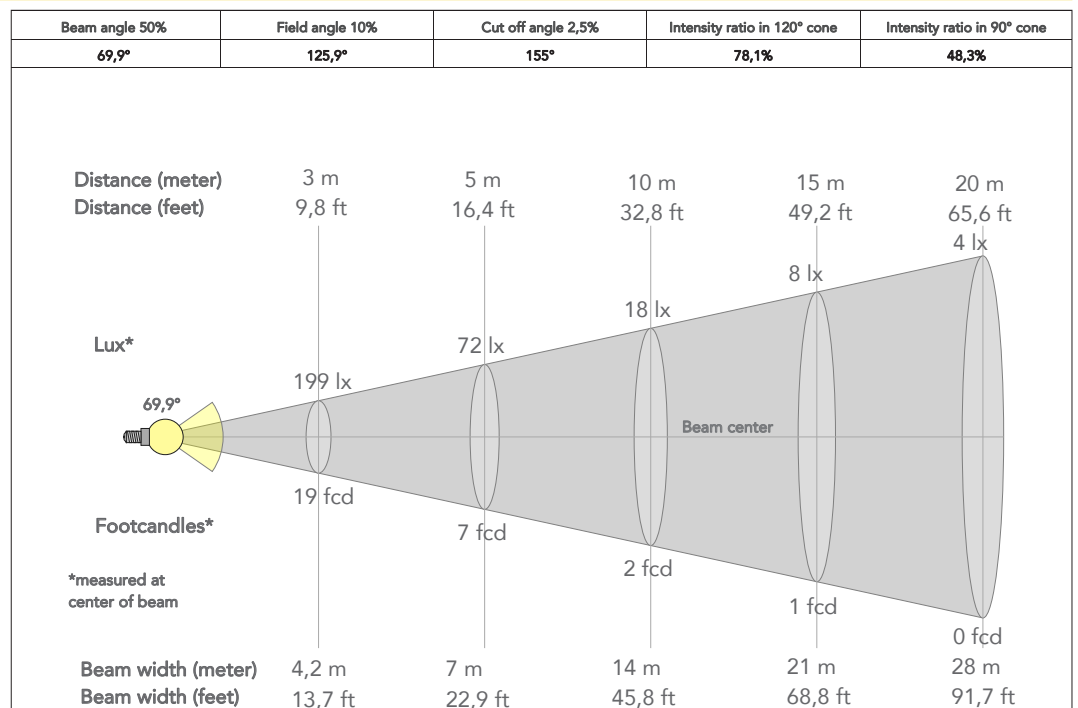

TECHNICAL DRAWINGS

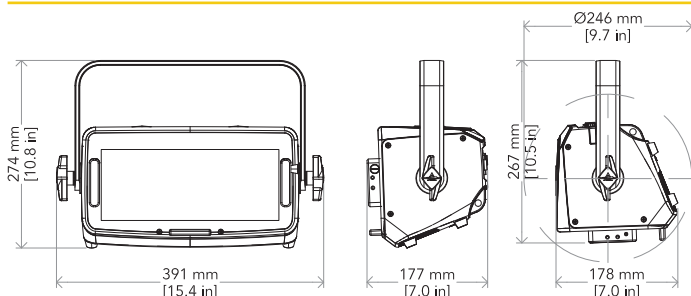

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website for specifications and tech documentations

