



Chroma-Q®

Fixture model

2inspire 300 Narrow 2400K

Field: 74°

Beam: 27°

Magnification (mf): 0.47 x

Candelas: 5300 Cd

Lumens: 2100 lm


Watts: 57 w

Lumen/w: 93.3 lm/w

CRI Ra: 65

TM-30 Rf / Rg: 74 / 110.5

Duv: 0

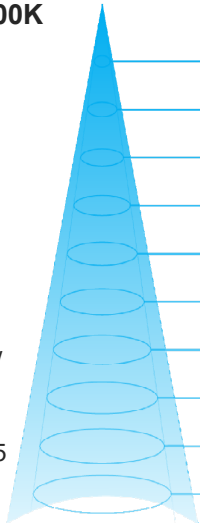

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.5 m	4.9 ft	0.5 m	1.5 ft	5300 lx	492 fc
1.53 m	5.0 ft	2.3 m	7.6 ft	0.7 m	2.4 ft	2264 lx	210 fc
3.05 m	10.0 ft	4.6 m	15.1 ft	1.4 m	4.7 ft	570 lx	53 fc
3.95 m	13.0 ft	6.0 m	19.5 ft	1.9 m	6.1 ft	340 lx	32 fc
4.56 m	15.0 ft	6.9 m	22.5 ft	2.1 m	7.0 ft	255 lx	24 fc
6.10 m	20.0 ft	9.2 m	30.2 ft	2.9 m	9.4 ft	142 lx	13 fc
6.85 m	22.5 ft	10.3 m	33.9 ft	3.2 m	10.6 ft	113 lx	10 fc
7.63 m	25.0 ft	11.5 m	37.7 ft	3.6 m	11.8 ft	91 lx	8 fc
9.15 m	30.0 ft	13.8 m	45.2 ft	4.3 m	14.1 ft	63 lx	6 fc
10.07 m	33.0 ft	15.2 m	49.8 ft	4.7 m	15.6 ft	52 lx	5 fc



Chroma-Q

Fixture photometric table

Fixture model
2inspire 300 Narrow 3200K

Field: 74°

Beam: 27°

Magnification (mf): 0.47 x

Candelas: 6600 Cd

Lumens: 2700 lm


Watts: 54 w

Lumen/w: 123.0 lm/w

CRI Ra: 82

TM-30 Rf / Rg: 87 / 108.5

Duv: 0

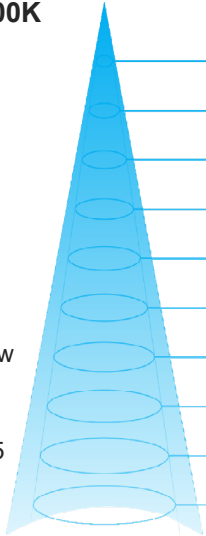

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.5 m	4.9 ft	0.5 m	1.5 ft	6600 lx	613 fc
1.53 m	5.0 ft	2.3 m	7.6 ft	0.7 m	2.4 ft	2819 lx	262 fc
3.05 m	10.0 ft	4.6 m	15.1 ft	1.4 m	4.7 ft	709 lx	66 fc
3.95 m	13.0 ft	6.0 m	19.5 ft	1.9 m	6.1 ft	423 lx	39 fc
4.56 m	15.0 ft	6.9 m	22.5 ft	2.1 m	7.0 ft	317 lx	29 fc
6.10 m	20.0 ft	9.2 m	30.2 ft	2.9 m	9.4 ft	177 lx	16 fc
6.85 m	22.5 ft	10.3 m	33.9 ft	3.2 m	10.6 ft	141 lx	13 fc
7.63 m	25.0 ft	11.5 m	37.7 ft	3.6 m	11.8 ft	113 lx	11 fc
9.15 m	30.0 ft	13.8 m	45.2 ft	4.3 m	14.1 ft	79 lx	7 fc
10.07 m	33.0 ft	15.2 m	49.8 ft	4.7 m	15.6 ft	65 lx	6 fc



Chroma-Q

Fixture photometric table

Fixture model
2inspire 300 Narrow 4800K

Field: 74°

Beam: 27°

Magnification (mf): 0.47 x

Candelas: 8000 Cd

Lumens: 3300 lm


Watts: 60 w

Lumen/w: 133.5 lm/w

CRI Ra: 95

TM-30 Rf / Rg: 93 / 104

Duv: 0

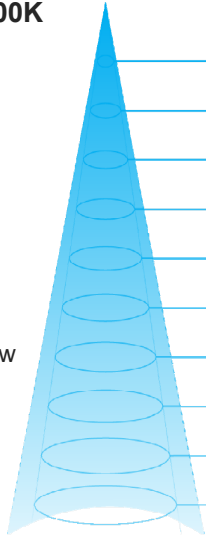

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.5 m	4.9 ft	0.5 m	1.5 ft	8000 lx	743 fc
1.53 m	5.0 ft	2.3 m	7.6 ft	0.7 m	2.4 ft	3417 lx	317 fc
3.05 m	10.0 ft	4.6 m	15.1 ft	1.4 m	4.7 ft	860 lx	80 fc
3.95 m	13.0 ft	6.0 m	19.5 ft	1.9 m	6.1 ft	513 lx	48 fc
4.56 m	15.0 ft	6.9 m	22.5 ft	2.1 m	7.0 ft	385 lx	36 fc
6.10 m	20.0 ft	9.2 m	30.2 ft	2.9 m	9.4 ft	215 lx	20 fc
6.85 m	22.5 ft	10.3 m	33.9 ft	3.2 m	10.6 ft	170 lx	16 fc
7.63 m	25.0 ft	11.5 m	37.7 ft	3.6 m	11.8 ft	137 lx	13 fc
9.15 m	30.0 ft	13.8 m	45.2 ft	4.3 m	14.1 ft	96 lx	9 fc
10.07 m	33.0 ft	15.2 m	49.8 ft	4.7 m	15.6 ft	79 lx	7 fc



Chroma-Q

Fixture model
2inspire 300 Narrow 5600K

Field: 74°

Beam: 27°

Magnification (mf): 0.47 x

Candelas: 7400 Cd

Lumens: 3100 lm


Watts: 54 w

Lumen/w: 137.9 lm/w

CRI Ra: 94

TM-30 Rf / Rg: 93 / 105

Duv: 0

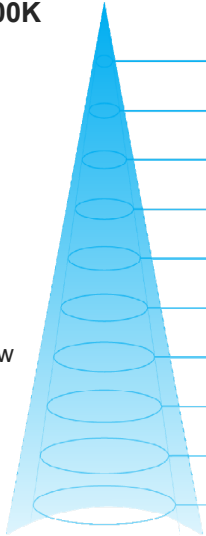

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.5 m	4.9 ft	0.5 m	1.5 ft	7400 lx	687 fc
1.53 m	5.0 ft	2.3 m	7.6 ft	0.7 m	2.4 ft	3161 lx	294 fc
3.05 m	10.0 ft	4.6 m	15.1 ft	1.4 m	4.7 ft	795 lx	74 fc
3.95 m	13.0 ft	6.0 m	19.5 ft	1.9 m	6.1 ft	474 lx	44 fc
4.56 m	15.0 ft	6.9 m	22.5 ft	2.1 m	7.0 ft	356 lx	33 fc
6.10 m	20.0 ft	9.2 m	30.2 ft	2.9 m	9.4 ft	199 lx	18 fc
6.85 m	22.5 ft	10.3 m	33.9 ft	3.2 m	10.6 ft	158 lx	15 fc
7.63 m	25.0 ft	11.5 m	37.7 ft	3.6 m	11.8 ft	127 lx	12 fc
9.15 m	30.0 ft	13.8 m	45.2 ft	4.3 m	14.1 ft	88 lx	8 fc
10.07 m	33.0 ft	15.2 m	49.8 ft	4.7 m	15.6 ft	73 lx	7 fc



Chroma-Q®

Fixture photometric table

Fixture model
2inspire 300 Narrow 6500K

Field: 74°

Beam: 27°

Magnification (mf): 0.47 x

Candelas: 7400 Cd

Lumens: 3100 lm


Watts: 55 w

Lumen/w: 135.3 lm/w

CRI Ra: 93

TM-30 Rf / Rg: 91 / 105

Duv: 0

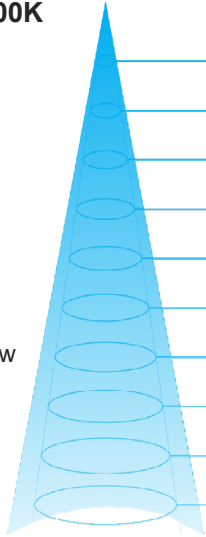

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.5 m	4.9 ft	0.5 m	1.5 ft	7400 lx	687 fc
1.53 m	5.0 ft	2.3 m	7.6 ft	0.7 m	2.4 ft	3161 lx	294 fc
3.05 m	10.0 ft	4.6 m	15.1 ft	1.4 m	4.7 ft	795 lx	74 fc
3.95 m	13.0 ft	6.0 m	19.5 ft	1.9 m	6.1 ft	474 lx	44 fc
4.56 m	15.0 ft	6.9 m	22.5 ft	2.1 m	7.0 ft	356 lx	33 fc
6.10 m	20.0 ft	9.2 m	30.2 ft	2.9 m	9.4 ft	199 lx	18 fc
6.85 m	22.5 ft	10.3 m	33.9 ft	3.2 m	10.6 ft	158 lx	15 fc
7.63 m	25.0 ft	11.5 m	37.7 ft	3.6 m	11.8 ft	127 lx	12 fc
9.15 m	30.0 ft	13.8 m	45.2 ft	4.3 m	14.1 ft	88 lx	8 fc
10.07 m	33.0 ft	15.2 m	49.8 ft	4.7 m	15.6 ft	73 lx	7 fc