

EclPar IPMFC

100W IP65 RGB+WW single source LED PAR



EclPar IPMFC is a flexible IP rated single source LED spotlight, featuring an 100W RGB+WarmWhite light source with high efficiency and advanced colour control.

Its Spektra calibrated LED source delivers a high-quality white reproduction with high CRI and TM30 with an advanced control over colours, ensuring consistency across fixtures.

The unit is compact and completely fan free, making the **EclPar IPMFC** a workhorse for any outdoor and dusty environment, corporate events or studios where silent operations are required.

The flexible optical system allow a wide selection of lenses from narrow 15° (on board), flood 30°, and ultra wide 60°, which can be quickly mounted in front of the luminaire or inside the front tempered glass for lasting exterior installation.

MAIN FEATURES

- 100W Spektra calibrated RGB + Warm White LED delivering high CRI, TLCI, TM30 values
- Flex lens system: 15° on-board - 30° and 60° optional
- IP65 for exterior application, fan free

VERSIONS

Code	Housing
ECLPARIPMFCBK	Black

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source:100 W RGB+WW LED array
- Luminous flux:(15°) 3'324 lm; (30°) 3'348 lm; (60°) 3'462 lm @full
- Lux:(15°) 1'772 lx; (30°) 332 lx; (60°) 155 lx @5 m full
- CRI:93,7 @3'200K; 91,1 @5'600K
- R9:89 @3'200K; 88 @5'600K
- TLCI:77 @3'200K; 86 @5'600K
- TM30 Rf:90 @3'200K; 89 @5'600K
- TM30 Rg:109 @3'200K; 108 @5'600K
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle:(on-board) 15° - (opt) 30°, 60°
- Field angle:(on-board) 26°
- Lens diameter:172 mm
- Lens type: parabolic reflector in combination with HD fresnel lens
- Additional optics:(opt) 30°, 60°
- Other: possible to mount lens both on the internal side and on the external side

COLOUR SYSTEM

- Colour mixing: RGB + Warm White
- CCT: CCT control, + / - green correction, tungsten emulation
- White presets:2.700 K ~ 10.000 K
- Macros: Gels library on-board

DYNAMIC EFFECTS

- Static mode: selection of static dimmer, colors and color temperature
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment
- Special features: linear crossfade channel from any white to any colour; virtual CTO on colours

BODY

- Body: sturdy die-cast aluminium body
- Body colour: black
- Other:Front mount holder for accessories as barn door, filter frame

CONTROL

- Protocols: DMX512, RDM, CRMX
- DMX channels:1 / 2 / 5 / 9 / 10 / 12 / 18 channel
- Wireless Control: optional, LumenRadio Timo Fx DMX/RDM compatible with both CRMX (Lumen Radio) and W-DMX (Wireless DMX)
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO/UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves:4 selectable dimming modes available
- Strobe / shutter:1 - 30 Hz, electronic
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 40.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption:120 W
- Output (at 230V):24 units on a single power line
- Power factor:> 0,94

PHYSICAL

- IP rating:65 for temporary outdoor application, not for fixed installations
- Cooling: passive cooling and fan-free
- Suspension and fixing: double hanging bracket suitable for safe hanging and for floor positioning
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- Dimensions (WxHxD):262x327x213 mm
- Weight:4,1 kg
- (*) NOTE: Suitable for permanent outdoor use, provided installation and maintenance cycles by qualified technicians are carried.

CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

ACCESSORIES & RELATED PRODUCTS


▪ FCLECLPARIPM	Flight case for 6 pcs of ECLPARIPM series	▪ SPGM12	28mm spigot for fixtures, M12 bolt
▪ EIPMBAG1U	Empty ABS case for 1 pc of ECLPARIPM series	▪ UPBOX1UP5	Firmware uploader kit, USB IN, 5p XLR DMX OUT, DMX OUT
▪ ECLPARIPMBDBK	Barn door with 8 directional flaps to adjust the light beam for ECLPARIPM	▪ UPBOXPRO	Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector
▪ ECLPARTPG	Gel filter frame for ECLPAR projectors	▪ TOUR53415L03BK	Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXW XLR (f) 5p
▪ EIPMRFFBK	Round filter frame for ECLPARIPM series black	▪ 958215L03	3x1.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW
▪ ECLPARIPMWBK	CRMX Timo Fx kit for ECLPARIPM series black	▪ 9513FXWL03	Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket
▪ EIPMLENS15/30/60	ECLPARIPM series lens 15°/30°/60°	▪ RSR0630B	Steel security cable for hanging bodies, inox steel shackle
▪ EIPMFILT1020/1040 1060/3060	Light diffusion filter for ECLPARIPM, asymmetric 10°x20°, 10°x40°, 10°x60°, 30°x60°	▪ C6002B	Slim aluminium clamp, 200 kg loading, 48-51 mm tubes, M10 bolt
▪ EIPMFHBK	Filter holder for ECLPARIPM series	▪ 9533FXWL03	Ass. 3x2.5mm TH07 cable, SCHUKO plug, MENAC3FXW socket
▪ EIPMFSN00TBK	Full snoot for ECLPARIPM series		
▪ EIPMHL0UVREBK	Honeycomb louvre for ECLPARIPM series		
▪ SPGM10	28mm spigot for fixtures, M10 bolt		

PRESET FULL ON

Beam angle 50%: 15,4°

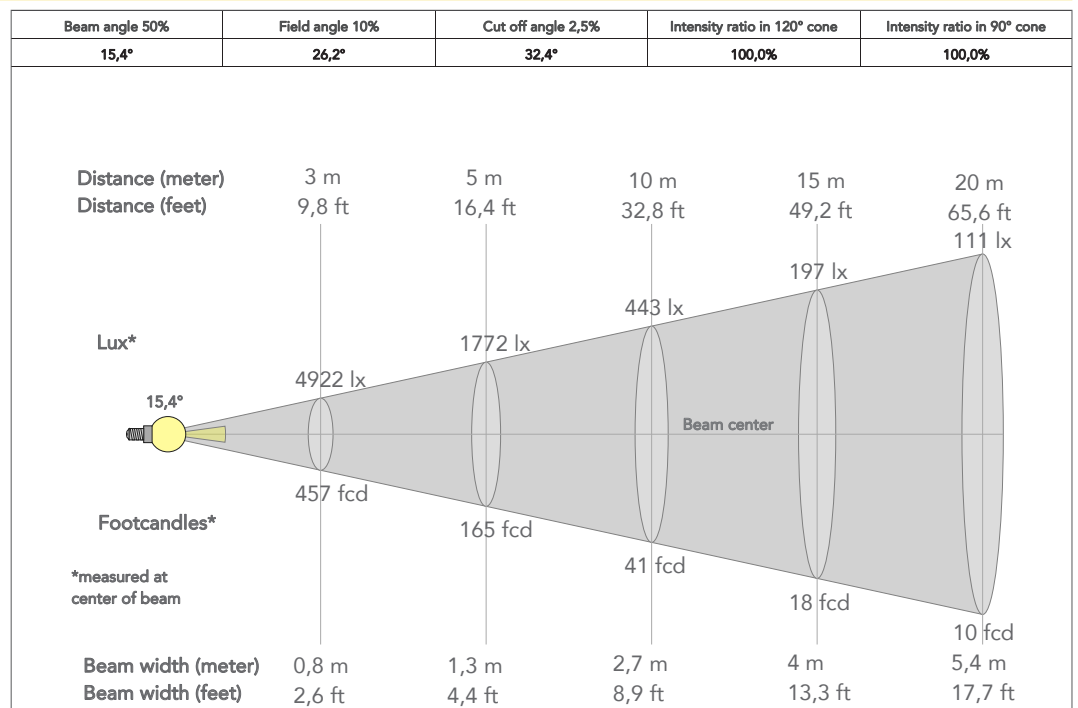

TECHNICAL DRAWINGS

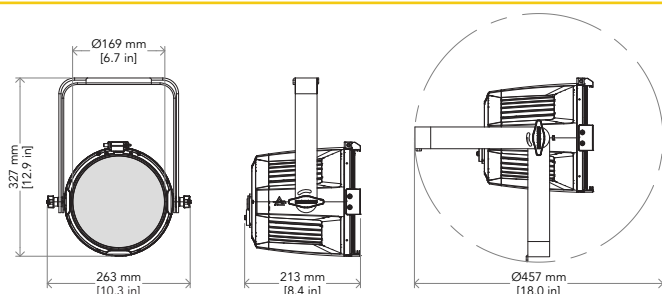

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
 Certified to CSA STD: C22.2 NO. 166

Visit our website for specifications and tech documentations

